

Razor having two slideable shaving headsField of the invention

The invention relates to safety razors and, more specifically, to razors provided with two shaving heads.

Background of the invention

Several attempts have been made to propose a razor including at least two shaving heads having different sizes to allow shaving of different hair areas of the body.

US patent No. 4,461,078 granted to Carreker discloses a razor assembly including first and second handle portions, with first and second razor heads mounted at the ends of the handle portions. The handle portions are pivotally mounted together so that the heads may be moved from a position wherein the handle portions are substantially in a straight line with the heads widely spaced, to a position wherein the handle portions make a small acute angle with the heads close to each other.

US patent No. 4,285,124 granted to Diakonov discloses a safety razor comprising a normal sized razor head and a retractable miniature razor head which is movable from a first position where it is retracted behind the normal sized head to a second position where it is deployed above the normal sized head for use in trimming the area beneath the center of the user's nose.

One disadvantage of such razors is that the use thereof is not perfectly safe. The user has to be very cautious in order not to cut himself or herself with one razor head while using the other.

A further disadvantage of Carreker's razor is that its handle is near twice as long as a standard razor handle, which makes it difficult to grip comfortably the handle.

Summary of the invention

It is an object of the invention to provide a razor having two shaving heads, the use of which is safer.

It is another object of the invention to provide a razor, the use of which is more comfortable.

The razor according to the invention comprises:

- 5 - an elongated hollow handle having a longitudinal axis, said handle having a front end and a back end opposite to the front end,
- 10 - a first razor head and a second razor head, both mounted onto a support which is mounted in the handle and is slideable with respect of the same along a direction substantially parallel to the handle axis, between at least:
 - 15 - a first use position in which said first razor head projects outward from the front end of the handle to allow shaving, while the second razor head is lodged within the handle, and
 - a second use position in which said second razor head projects outward from the back end of the handle to allow shaving, while the first razor head is lodged within the handle,
- 20 - a manually operable actuator mounted on the support for moving the same from one position to the other.

Accordingly, while the one head is in use position, the other is substantially out of reach, thereby decreasing the risk that the user cut himself or herself.

- 25 The razor according to the invention is also compact, which allows comfortable gripping while shaving.

According to a preferred embodiment, the support is capable of occupying a third or intermediate position in which both razor heads are lodged within the handle.

- 30 The razor may comprise means for locking said support in its first use or second use or intermediate position.

Such locking means may be at least partly provided onto said manually operable actuator.

The actuator preferably comprises a hollow body and a

pusher provided with arms capable of being clipped in slots provided in the handle. The pusher is slideable with respect of the body, between a locking position in which the arms are received in the slots, and an unlocking position in which the arms are located outward from the slots.

The razor preferably comprises a compression spring which permanently biases the pusher toward its locking position.

Furthermore, the handle may comprise two longitudinal rails which slidably cooperate with the support so as to guide it during movement.

The razor heads preferably have different sizes, in order to allow shaving of different hair areas of the body.

In a preferred embodiment, where each razor head consists in a removable cartridge, the razor comprises a lock-and-release mechanism for disposal and replacement of each razor head.

Each lock-and-release mechanism is mounted on the support, at an end thereof, and comprises:

- a resilient V-shaped retainer having two legs provided with bearing members for the mounting of a razor head, the legs having lateral wings;
- a plunger;
- a spring biasing the plunger towards the razor head;
- a cam member for biasing the legs of the retainer away for each other,

the razor further comprising a pair of actuators for triggering said lock-and-release mechanism, each actuator comprising:

- a flat spring member having a fixed portion attached to the handle and a flexible portion,

- a button accessible to the fingers of a user and cooperating with said flexible portion, whereby, in one use position, the lateral wings cooperate with the flexible portion (thereby allowing disposal and replacement of the razor head), whereas in the intermediate position or in the other use position the lateral wings cooperate with the fixed portion (thereby preventing disposal of the razor head).

In a preferred embodiment, wherein the handle comprises a top shell member and a bottom shell member, in addition to their triggering function, the spring members form clip members for holding said shell members together.

More precisely, the fixed portion of each spring member comprises a pair of holes which cooperate with hooks formed in the top shell member and the bottom shell member, respectively.

In addition, the razor may comprise a movable or flexible cover covering each end of the handle when the corresponding razor head is lodged within the handle.

The above and other objects and advantages of the invention will become apparent from the detailed description of preferred embodiments of the invention, considered in conjunction with the accompanying drawings.

Brief description of the drawings

Figure 1 is a perspective view of a razor according to a preferred embodiment of the invention, shown in a first use position.

Figure 2 is a perspective view of the razor of **figure 1**, shown in an intermediate position.

Figure 3 is a perspective view of the razor of **figures 1 and 2**, shown in a second use position.

Figure 4 is an top view of the razor of the preceding figures, in the intermediate position.

Figure 5 is an exploded perspective top view of the

razor of the preceding figures.

Figure 6 is a longitudinal elevational cut view of the razor of the preceding figures, taken along the line VI-VI of figure 4.

5 **Figure 7** is a transversal elevational cut view of the razor of the preceding figures, taken along the line VII-VII of **figure 4**.

10 **Figure 8** is a partial perspective top view of the razor of the preceding figures, shown in the intermediate position.

Figure 9 is a partial perspective bottom view of the razor of the preceding figures, shown in the intermediate position.

15 **Figure 10** is an exploded partial perspective bottom view of the razor of **figure 9**.

Figure 11 is a view similar to **figure 8**, showing the razor in a first use position.

Figure 12 is a view similar to **figure 8**, showing the razor in a second use position.

20 **Figure 13** is a top perspective view showing a lock-and-release mechanism for the razor of the preceding figures, in an intermediate position.

Figure 14 is view similar to Figure 13, showing the lock-and-release mechanism in a first use position.

25 **Figure 15** is a planar top view showing a holder for the razor of the preceding figures.

Figure 16 is an exploded perspective view showing the holder of **figure 15** and the razor of the preceding figures.

30 **Figure 17** is a perspective view showing the assembly of the holder of **figures 15** and **16** and the razor of the preceding figures.

Figure 18 is a planar top view of the assembly of **figure 17**.

A razor according to the invention is generally indicated by reference number **1** in the drawings.

Razor **1** comprises a handle **2** which is elongated along a longitudinal axis **X**. Handle **2** is hollow, thereby forming a housing defining an open front end **3** and an opposite open back end **4**. It has a central constriction **5** and presents in side view an arcuate shape, thereby providing comfortable hand grasping. Therefore, the handle axis **X** can be considered as an arcuate average line joining the center points of the open ends **3**, **4**.

Razor **1** further comprises a first shaving blade unit or head **6**, including one or more blades (three in the illustrated example) and which is mounted at the front end **3** of the handle **2** so that the edges of the blades are substantially perpendicular to the handle axis **X**.

First head **6** is movable with respect of the handle **2** along a direction substantially parallel to the handle axis **X**, between:

- a use position in which the head **6** projects outward from the front end **3** of the handle **2** (**figures 1, 11**), and
- a retracted position in which the head **6** is lodged within the housing formed within the handle **2** (**figures 2, 3, 6, 8, 12**).

In the use position, the first head **6** is ready for use to allow shaving, while in the retracted position it is hidden in the handle **2** so that it is inoperable and substantially unreachable with the fingers to be protected from damage and avoid any accidental cutting.

As illustrated on **figure 5**, razor **1** also comprises a second blade unit or head **7** comprising one or more blades (two in the illustrated example) and which is mounted at the back end **4** of the handle **2** so that the edges of the

blades are substantially perpendicular to the handle axis **X**. In other words, first head **6** and second head **7** extend substantially parallel to each other.

5 The heads **6, 7** preferably have different sizes, the first one **6** having a standard width **W6** while the second one **7** has a width **W7** which is less than **W6** (see **figures 1** and **3**).

10 Standard head **6** is used in normal shaving (beard, legs), while the narrow one **7** is dimensioned for easy maneuverability in order to facilitate accurate trimming of particular hair areas, e.g. moustaches, sideburns or pubic hairs.

15 As the standard head **6**, the narrow head **7** is movable with respect of the handle **2** along a direction parallel to the handle axis **X**, between:

- a use position in which the narrow head **7** projects outward from the back end **4** of the handle **2** (**figures 3, 12**), and
- a retracted position in which the narrow head **7** is lodged within the housing formed by the handle **2** (**figures 1, 2, 6, 11**).

20 In its use position, the narrow head **7** is ready for use to allow shaving, while in the retracted position it is hidden in the handle **2** so that it is inoperable and unreachable with the fingers to be protected from damage and avoid any accidental cutting.

25 Both heads **6, 7** are mounted on a common support or platform member **8** which is in turn mounted in the handle **2** so as to be safely slideable with respect of the same, between:

- a first use position (**figure 11**) in which the standard head **6** is in its use position while the narrow one **7** is in its retracted position,

- a second use position (**figure 12**) in which the standard head **6** is in its retracted position while the narrow one **7** is in its use position, and
- an intermediate position (**figures 6, 8, 9**) in which
5 both shaving heads **6, 7** are in their retracted position (**figures 6, 8**).

As illustrated on **figure 5**, handle **2** comprises a bottom shell member **9** and a top shell member **10** which are permanently attached to one another and together enclose the sliding platform member. **Figure 8** is a perspective top
10 view of the razor **1** from which the top shell member **10** has been removed to show the inside of the razor **1**. **Figure 9** is, in turn, a perspective bottom view of the razor **1** from which the bottom shell member **9** has been removed to show
15 the inside of the razor **1**.

As illustrated in **figure 8**, the platform member **8** comprises an elongated arcuate plate member **11** which has substantially the same curvature as the handle **2**. Platform member **8** comprises a longitudinal stiffening rib **12** and
20 two spaced transversal ribs **13, 14** which protrude from a top surface **15** of the plate member **11**, and also a hollow central housing **16** defined, on the one hand, by a pair of opposed transversal walls **17, 18** protruding from the top surface **15**, and, on the other hand, by a pair of opposed
25 longitudinal side walls **19, 20** also protruding from the top surface **15** in the continuity of the transversal walls **17, 18**.

A flat arcuate guiding plate **21** is clipped onto the platform member **8**. More precisely, the guiding plate **21** is
30 provided with a central hole **22**, the edge of which cooperates with hooks **23, 24** protruding from the transversal walls **17, 18**. The guiding plate **21** has a bottom surface **25** which is in contact with a top edge **26**

of the stiffening ribs **12**, **13**, **14**, thereby providing stable mounting of the guiding plate **21** on the platform member **8**.

Platform member **8** also comprises a pair of parallel
5 ribs **27**, **28** protruding from a lower surface **29** of the platform member **8**, and which extend longitudinally substantially all along the length of the platform member **8**.

As illustrated in **figure 5**, the handle **2** is provided
10 with means for guiding the sliding platform member **8**, which comprise two parallel elongated bottom rails **30**, **31** protruding from an inner bottom surface **32** of the bottom shell member **9**, and extending along each lateral side of the pair of parallel ribs **27**, **28**.

15 The guiding means also comprise two parallel elongated top rails **33**, **34** protruding from an inner top surface **35** of the top shell member **10**, extending along lateral edges of the guiding plate **21**.

As a result, the platform member **8** is precisely
20 slidingly guided between the bottom shell member **9** and the top shell member **10**.

Razor **1** further comprises a manually operable actuator
36 which is slideable with respect of the top shell member
10 along a direction substantially parallel to the handle
25 axis **X**, for moving the platform member **8** from one position to the other.

As illustrated on **figure 8**, the actuator **36** is mounted
on the platform member and comprises a cylindrical hollow
body **37** which has four projecting parallel flexible lugs
30 **38** passing through a central aperture **39** defined in the platform member **8** by the housing **16**. The lugs **38** are provided with hooks **40** which engage longitudinal bridge members **41** extending across the central aperture **39**, so

that the actuator **36** is clipped on the platform member **8**.

The hollow body **37** of the actuator **36** passes through an elongated aperture **42** which is formed in the top shell member **10** between the top rails **33**, **34**. The actuator **36** also has a substantially flat head **43** which projects, at one end of the body **37** opposite to the lugs **38**, from a top external surface **44** of the top shell member **10**.

The head comprises a recess **45** for receiving a finger (e.g. the thumb) of a user to help him grip the actuator **36**.

The actuator **36** also comprises a release button **43** including a pusher **47** which is slidably mounted in the body **37** along an elevational axis **Y** substantially perpendicular to the handle axis **X**. Pusher **47** has a main body **48** mounted in a corresponding bore **49** formed in the body **37** of the actuator **36**, and diametrically opposed transversal arms **50**, **51** which project laterally from the main body **48** and which are received in respective lateral slots **52** formed in the longitudinal side walls **19**, **20** of the housing **16**.

The release button **46** also includes a cover member **53**, which projects from the recess **45** to be accessible for a user's finger, and which is clipped onto the pusher **47** by means of hooks **54** cooperating with corresponding shoulder surfaces **55** formed on the main body **48** of the pusher **47**.

Pusher **47** is slideable with respect of the body **37** along the elevational axis **Y**, between a locking position in which the pusher **47** is at a distance from the plate member **11**, the cover member **53** projecting from the recess **45**, and an unlocking position in which the pusher **47** is close to the plate member **11**, the cover member **53** being at least partly received within the recess **45**.

Pusher **47** comprises a cylindrical pin **56**, in the

continuity of the main body 48 on the other side of the transversal arms 50, 51, so that the pusher 47 is substantially cross-shaped.

5 A return spring 57 is mounted in compression between the pusher 47 and the platform member 8, so as to permanently bias the pusher 47 towards its locking position. More precisely, spring 57 has a bottom end 58 which is mounted onto a pin 59 protruding from the plate 11, and a top end 60 which is mounted on the pin 56 of the
10 pusher 47, the pins 56, 59 thereby together forming spring guiding means.

As illustrated in figure 10, each top rail 33, 34 is provided with three spaced apart slots 61, 62, 63, in which the transversal arms 50, 51 are capable of being
15 received, depending on the position of the actuator 36, i.e. a front end slot 61, located near the front end 3 of the handle 2, a back end slot 62, located near the back end 4, and an intermediate slot 63, located between the front end slot 61 and the back end slot 62.

20 As illustrated in figure 9, in the intermediate position of the actuator 36, the arms 50, 51, which act as locking means for locking the platform member 8 in position, are received in the intermediate slots 63. In this position, the platform member 8 is in its
25 intermediate position, both shaving heads 6, 7 being received within the handle 2.

As the spring 57 biases the pusher 47 to its locking position, the arms 50, 51 abut longitudinally against transversal shoulder surfaces of the intermediate slots
30 63, thereby preventing the platform member 8 to move longitudinally.

Whenever the user wants to take out any of the shaving heads 6, 7, he squeezes the release button 46 against the

action of the return spring 57, thereby releasing the arms 50, 51 from the intermediate slot 63. The user is then capable of sliding the actuator 36 in each direction with respect of the handle 2 so as to move the platform member 8 toward the first or the second use position.

During movement of the platform member 8 toward any of the first or second use positions, the platform member 8 being precisely guided by the top and bottom rails 30, 31, 33, 34 as described hereabove, the arms 50, 51 slide onto edges 64 of the top rails 33, 34, thereby holding the pusher 47 in its unlocking position.

As soon as the arms 50, 51 come in front e.g. of the front end slot 61, the return spring 57 suddenly moves the pusher 47 toward its locking position, where the arms 50, 51 are clipped in the front end slots 61, thereby locking the platform member 8 in its first use position.

Respectively, as soon as the arms 50, 51 come in front of the back end slot 62, the spring 57 suddenly moves the pusher 47 toward its locking position, where the arms 50, 51 are clipped in the back end slots 62, thereby locking the platform member 8 in its second use position.

Accordingly, whichever the position of platform member 8 is, it is strongly held in position with respect of the handle 2, thereby preventing the heads 6, 7 from accidentally moving from one position to the other. Accordingly, there is low risk that a user cuts himself or herself with one head while shaving with the other. Moreover, since the actuator 36 is on a top side of the razor 1, there is also low risk that during shaving the fingers of the user, which grasp the razor 1 by its lateral faces, accidentally move the actuator 36. This further increases safety of the razor 1.

Moreover, whichever the position of the platform

member 8 is, the flat arcuate guiding plate 11 always blanks the elongated aperture 42, thereby preventing visual access to the technical parts inside the handle 2 and therefore enhancing visual aspect of the razor 1.

5 In addition, each shaving head 6, 7 consists in a replaceable cartridge which is removably attached to the platform member 8 so that after the edges of the blades are dulled the cartridges 6, 7 are disposed of and replaced by new ones.

10 In order to achieve replacement of the shaving heads 6, 7, the razor 1 includes two lock-and-release mechanisms 65, respectively mounted in seats 66, 67 provided at both ends of the platform member 8.

Each lock-and-release mechanism 65 includes a
15 resilient V-shaped retainer 68 having two legs 69, 70 movable toward and away from each other. Bearing members 71 are formed at the ends of the legs 69, 70, removably attached to corresponding curved hooks 72 provided on the
20 back side of the corresponding shaving head 6, 7 to permit swiveling movement of the shaving head 6, 7 with respect of the platform member 8.

A cam member 73 is mounted between the legs 69, 70 for permanently biasing them away from each other in order to maintain the bearing members 71 in cooperation with the
25 corresponding hooks 72. Between the legs 69, 70 is also mounted a plunger 74, a front portion 75 of which is in contact with a V-shaped cam surface provided on the back side of the shaving head 6, 7. A compression spring 76, interposed between the plunger 74 and the cam member 73,
30 biases them away from each other, thereby pushing forward the plunger 74 to maintain permanent contact of the latter with the shaving head 6, 7, and pushing backwards the cam member 73 to maintain permanent contact of the latter with

the legs 69, 70.

The lock-and-release mechanism 65 is triggered by actuators 77 mounted near the ends 3, 4 of the handle 2. Each actuator 77 includes a button 78 which is mounted on
5 a flexible front portion 79 of a flat metal spring member 80, a fixed back portion 81 of which is rigidly maintained in grooves 82, 83 formed in side walls 84, 85 of the bottom and top shell members 9, 10.

The front portion 79 of each flat spring member 80
10 extends longitudinally across an oval-shaped side opening 86 formed in the vicinity of each end of the handle by complementary cut-outs 87, 88 in the shell members 9, 10.

Each spring member 80 is provided with two rectangular holes formed in the fixed back portion, i.e. a bottom hole
15 89, which cooperates with a hook 90 formed in the side wall 84 of the bottom shell member 9, and a top hole 91 which cooperates with a hook 92 formed in the side wall 85 of the top shell member 10. The spring members 80 thereby form clip members which hold the bottom and top shell
20 members 9, 10 together.

Each button 78 has an oval-shaped main body 93 which extends transversally through the opening 86 to be accessible for the fingers of the user, and a base portion 94 having an inwardly directed flat surface 95 in contact
25 with the front portion 79 of the spring member 80, and an outwardly directed shoulder surface 96 which abuts against an inner edge of the opening 86.

Each leg 69, 70 has a transversally protruding wing 97, an end of which is in contact with an inner surface 98
30 of the flat spring member 80.

As depicted on figure 8, each lock-and-release mechanism 65 is attached to the platform member 8 by means of a cover member 99, which is clipped onto the platform

member 8, thereby sandwiching the lock-and-release mechanism 65 and holding it in place. More precisely, the cover member 99 comprises lateral flanges 100 provided with openings 101, edges of which cooperate with corresponding hooks 102 provided on the platform member 8. Cut-outs 103 are formed in side walls of the cover member 99 for free passage of the wings 97.

Longitudinal grooves 104, 105 are formed in the cover member 99 and in the platform member 8, cooperating with corresponding ribs 106 provided on the plunger 74 in order to guide forth and back movement of the latter.

In the use position, wherein the razor head 6 or 7 protrudes from the corresponding end 3 or 4 of the handle 2, the wings 97 contact the flexible front portion 79 of the flat spring member 80, so that, under manual action, movement of the buttons 78 toward each other biases the legs 69, 70, via the wings 97, thereby releasing the bearing members 71 from the hooks 72, whereas forward movement of the plunger 74 under bias of the spring 76 ejects the shaving head 6 or 7 and allows for disposal and replacement of the latter.

In the intermediate position or in the other use position of the platform member 8, wherein the razor head 6 or 7 is received within the handle 2, the wings 97 contact the fixed back portion 81 of the flat spring member 80, so that movement of the buttons 78 has no effect on the legs 69, 70, thereby preventing disposal and replacement of the razor head 6 or 7 when it is not in use position. Making it is possible to replace a shaving head only when it is in its use position prevents any wrong action on the buttons from accidentally ejecting head when disposal and replacement are not necessary.

As depicted on figures 16 and 17, razor 1 can be

removably mounted on a razor holder **107** to form a shaving system **108**. Holder **107** has a planar back wall **109** for attachment to a wall **110**, e.g. a bathroom or a shower wall, by means of a double-sided adhesive pad, a suction cup or any suitable equivalent means.

Holder **107** comprises lateral wings **111**, **112** for engaging the razor handle **2**, the wings **111**, **112** together forming a V-shaped seat against which abuts a complementary side surface **113** of the handle **2**, located in the vicinity of the central constriction **5**. As depicted on **figure 15**, the wings **111**, **112** are curved toward each other, so as to follow the curvature of the side surface **113** and firmly retain the razor **2** by simple vertical interlocking.

In the above recited embodiment, both ends **3**, **4** of the handle **2** are permanently open. However, in optional embodiments, they may be at least partially and/or temporarily covered by cover members.

In a first optional embodiment, the razor is provided with movable flaps which are slidably mounted on the handle under control of the platform actuator, between:

- a closed position in which each flap covers a corresponding end of the handle, so as to prevent manual access to the blades and protect the inside of the handle (in particular against dust and moisture), and
- an open position in which each flap uncovers the corresponding end, so as to allow the razor head to project outward from the end.

In a second optional embodiment, the razor is provided with manually removable lids which are mounted onto the ends of the handle whenever the corresponding razor heads are in retracted position, so as to prevent manual access to the blade and protect the inside of the handle. As soon

as the user needs to use one of the razor heads, he simply has to remove the corresponding lid.

In a third optional embodiment, each end of the razor handle is provided with a flexible terminal wall (e.g. made of thermoelastic or rubber material) which allows the corresponding razor head to pass through when moving from its use position to its retracted position, and vice-versa.

For instance, this terminal wall is provided with a central slot through which the corresponding razor head is able to pass while distorting the wall. The terminal wall forms a shield which prevents manual access to the blades and protects the inside of the handle, in particular against dust and moisture.

CLAIMS

5 1. Razor (1) comprising:

- an elongated hollow handle (2) having a longitudinal axis (X), said handle (2) having a front end (3) and a back end (4) opposite to the front end (3),
- a first razor head (6) and a second razor head (7),
10 both mounted onto a support (8) which is mounted in the handle (2) and is slideable with respect of the same along a direction substantially parallel to the handle axis (X), between at least:
 - a first use position in which said first razor head
15 (6) projects outward from the front end (3) of the handle (2) to allow shaving, while the second razor head (7) is lodged within the handle (2), and
 - a second use position in which said second razor head (7) projects outward from the back end (4) of
20 the handle (2) to allow shaving, while the first razor head (6) is lodged within the handle (2),
- a manually operable actuator (36) mounted on the support (8) for moving the same from one position to the other.

25 2. Razor (1) according to claim 1, wherein the support (8) is capable of occupying a third or intermediate position in which both razor heads (6, 7) are lodged within the handle (2).

30 3. Razor (1) according to claim 1, further comprising means (36, 46, 47, 50, 51, 57, 61, 63) for locking said support (8) in its first or second use position.

4. Razor (1) according to claim 2, further comprising means (36, 46, 47, 50, 51, 57, 62) for locking

said support in its intermediate position.

5. Razor (1) according to claim 3 or claim 4, wherein said locking means are at least partly provided onto said manually operable actuator (36).

5 6. Razor (1) according to claim 5, wherein said actuator (36) comprises a hollow body (37) and a pusher (47) provided with arms (50, 51) capable of being clipped in slots (61, 62, 63) provided in the handle (2), and wherein said pusher (47) is slideable with respect of said
10 hollow body (37), between a locking position in which the arms (50, 51) are received in the slots (61, 62, 63), and an unlocking position in which the arms (50, 51) are located outward from the slots (61, 62, 63).

7. Razor (1) according to claim 6, further
15 comprising a compression spring (57) which permanently biases the pusher (47) toward its locking position.

8. Razor (1) according to any of claims 1-7, wherein said handle (2) comprises a pair of longitudinal rails (30, 31) which slidingly cooperate with the support
20 (8) so as to guide it during movement.

9. Razor (1) according to any of claims 1-7, wherein the razor heads (6, 7) have different sizes.




10. Razor (1) according to any of claims 1-8, wherein each razor head (6, 7) consists in a removable
25 cartridge, and wherein the razor (1) comprises a lock-and-release mechanism (65) for disposal and replacement of each razor head (6, 7).

11. Razor (1) according to claim 10, wherein each lock-and-release mechanism (65) is mounted on the support
30 (8), at an end thereof.

12. Razor (1) according to claim 11, wherein each lock-and release mechanism (65) comprises:

- a resilient V-shaped retainer (68) having two legs (69, 70) provided with bearing members (71) for
35 the mounting of a razor head (6, 7),

- a plunger (74);
 - a spring (76) biasing the plunger (74) towards the razor head (6, 7);
 - a cam member (73) for biasing the legs (69, 70) of the retainer (68) away for each other,
- 5 wherein the legs (69, 70) of the retainer (68) have lateral wings (97), and
- wherein the razor (1) further comprises a pair of actuators (77) for triggering said lock-and-release
- 10 mechanism (65), each actuator (77) comprising:
- a flat spring member (80) having a fixed portion (81) attached to the handle (2) and a flexible portion (79),
 - a button (78) accessible to the fingers of a user
- 15 and cooperating with said flexible portion (79),
- whereby, in one use position, the lateral wings (97) cooperate with the flexible portion (79), whereas in the intermediate position or in the other use position the lateral wings (97) cooperate with the fixed portion (81).
- 20 13. Razor (1) according to claim 12, wherein the handle (2) comprises a bottom shell member (9) and a top shell member (10), and wherein the spring members (80) form clip members for holding said shell members (9, 10) together.
- 25 14. Razor (1) according to claim 13, wherein the fixed portion (81) of each spring member (80) comprises a pair of holes (89, 91) which cooperate with hooks (90, 92) formed in the bottom shell member (9) and the top shell member (10), respectively.
- 30 15. Razor (1) according to any of claims 1-9, further comprising a movable or flexible cover covering each end of the handle when the corresponding razor head is lodged within the handle.

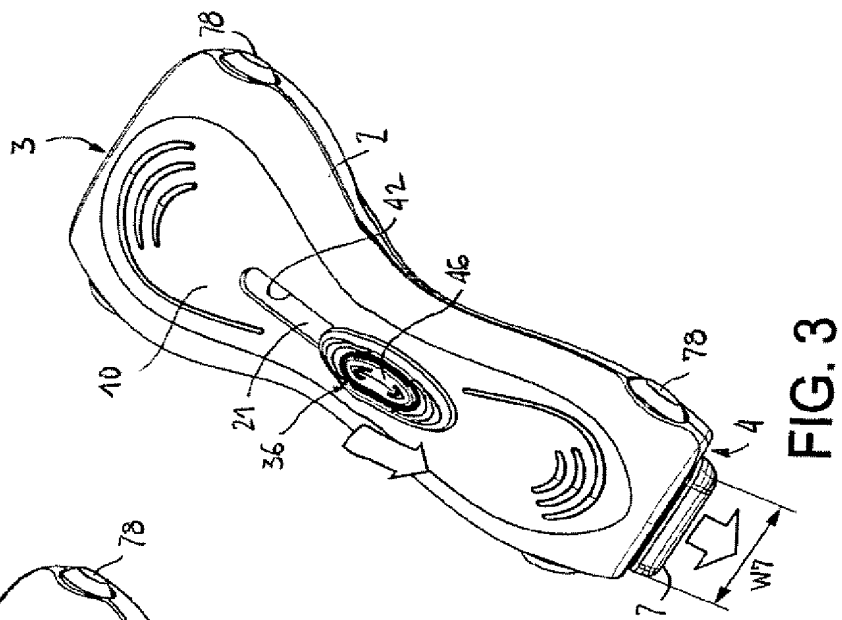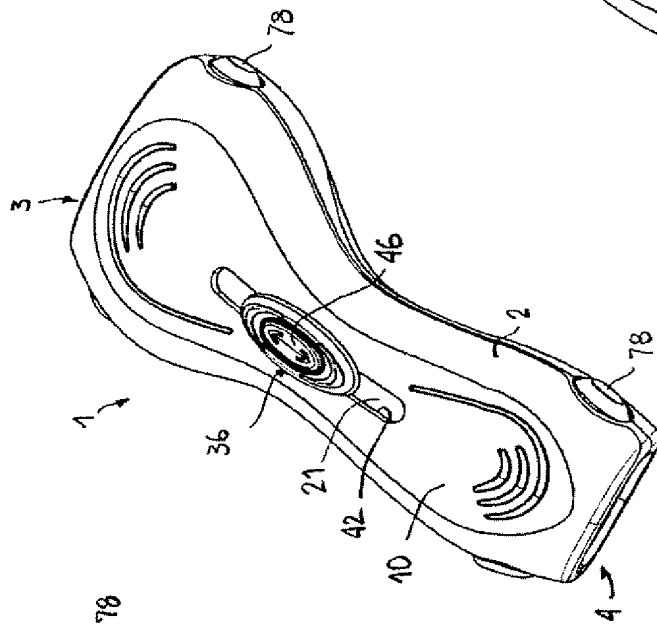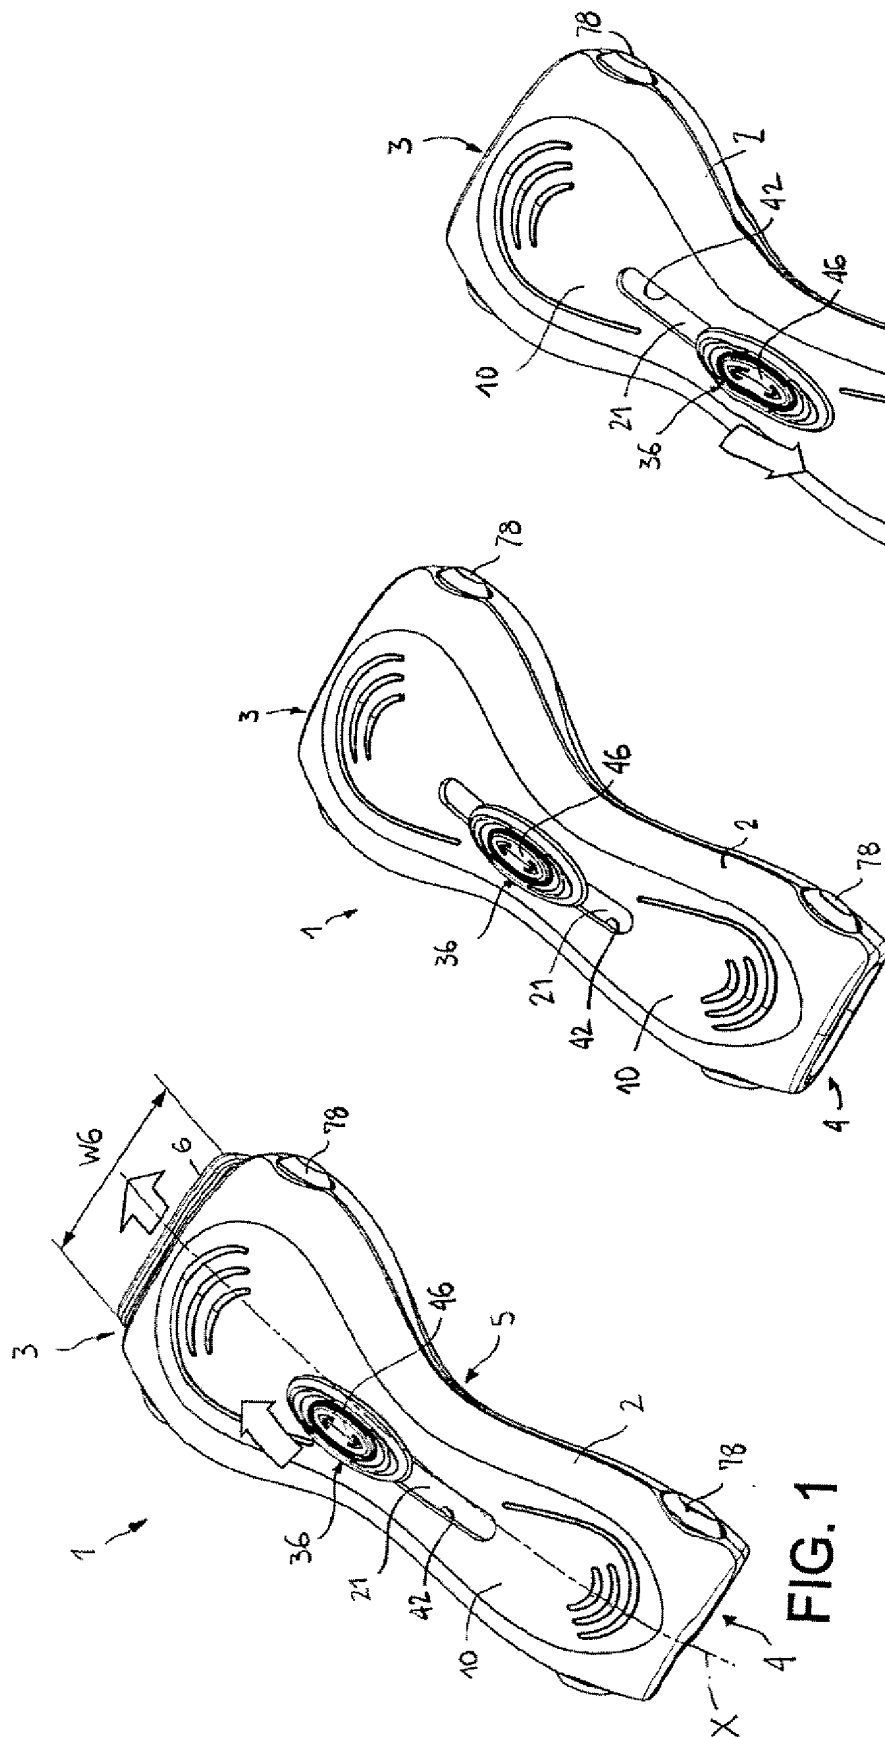

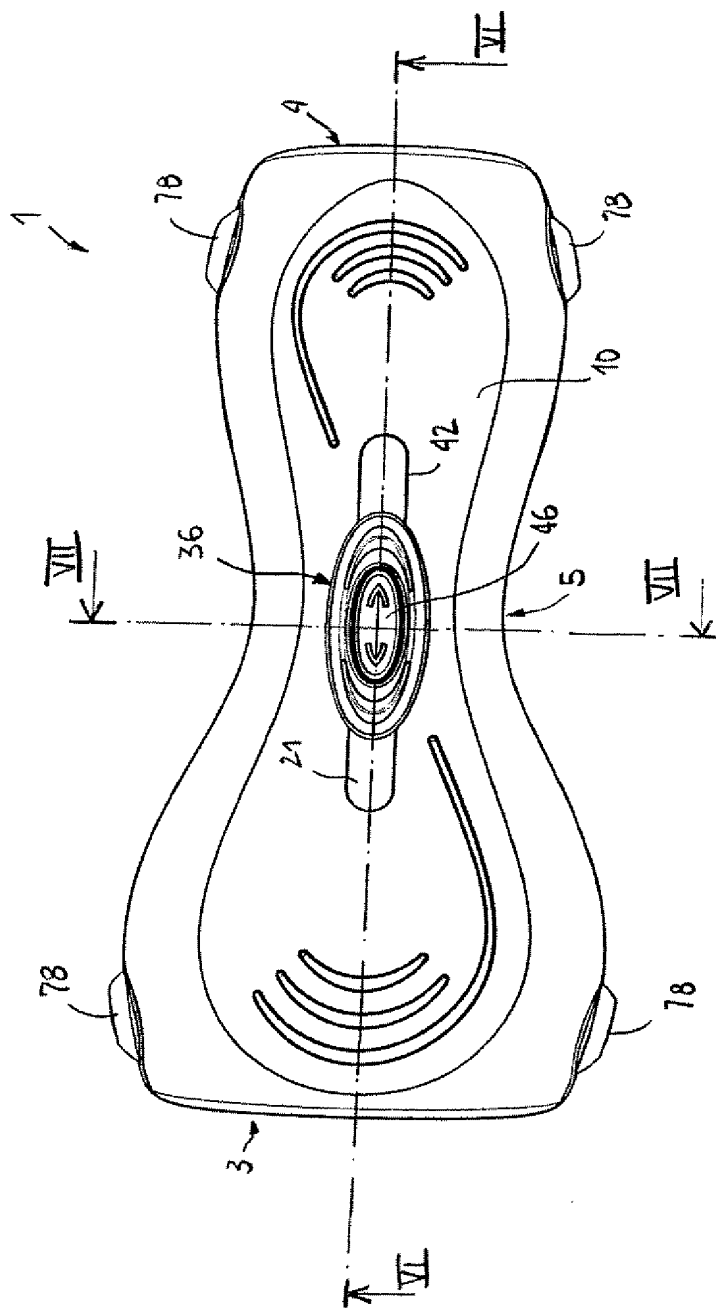


FIG. 4

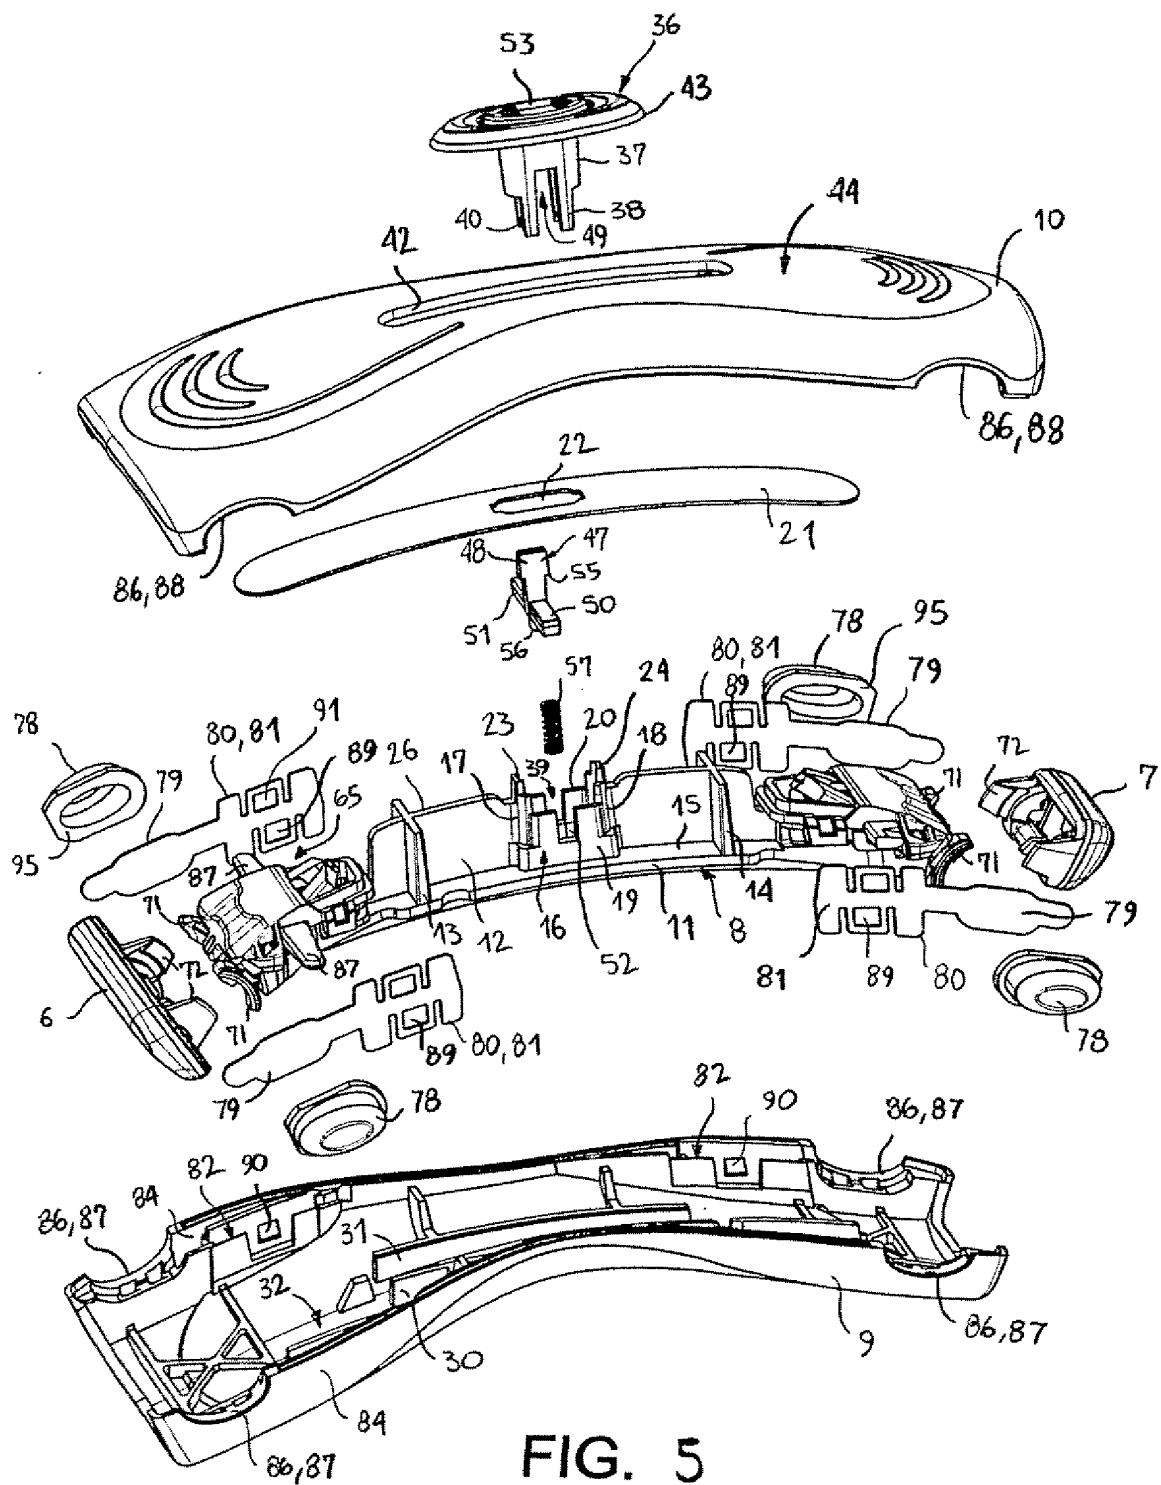


FIG. 5

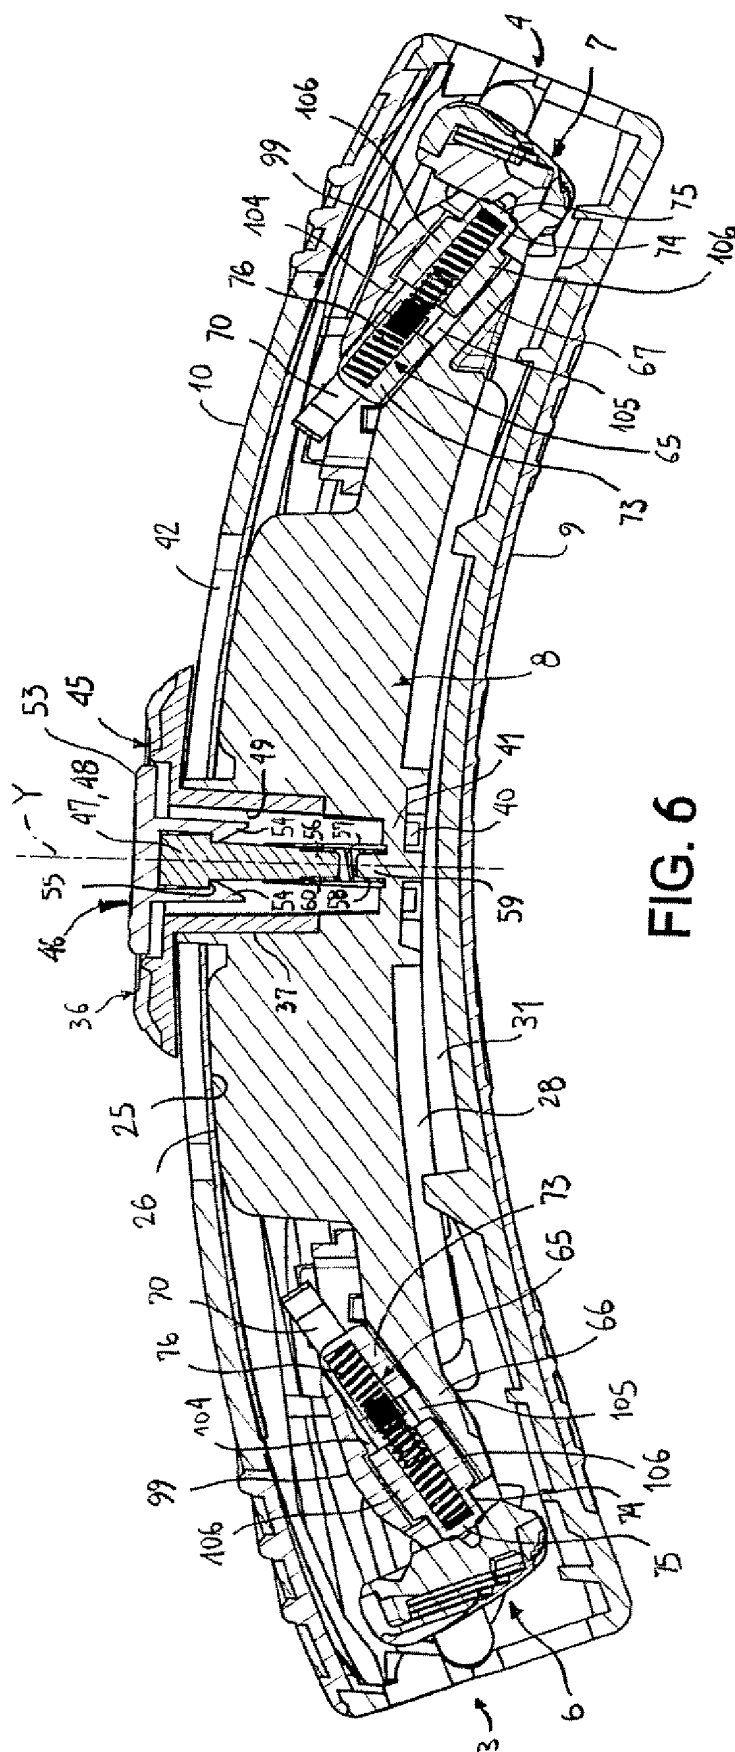


FIG. 6




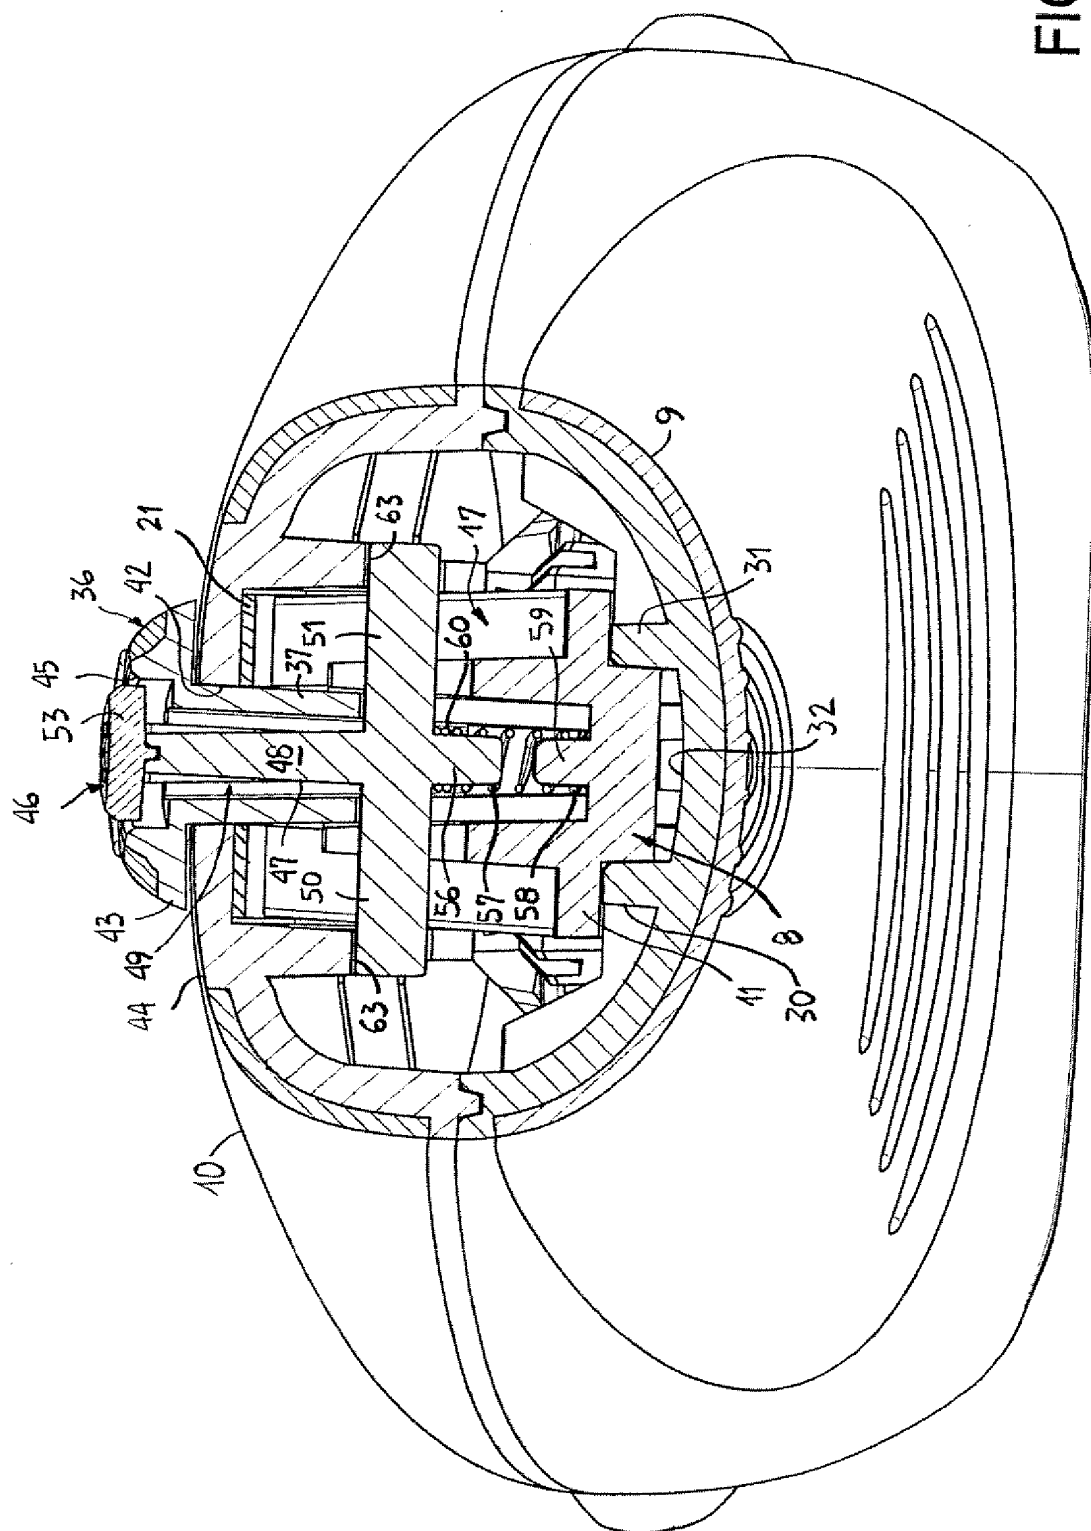


FIG. 7

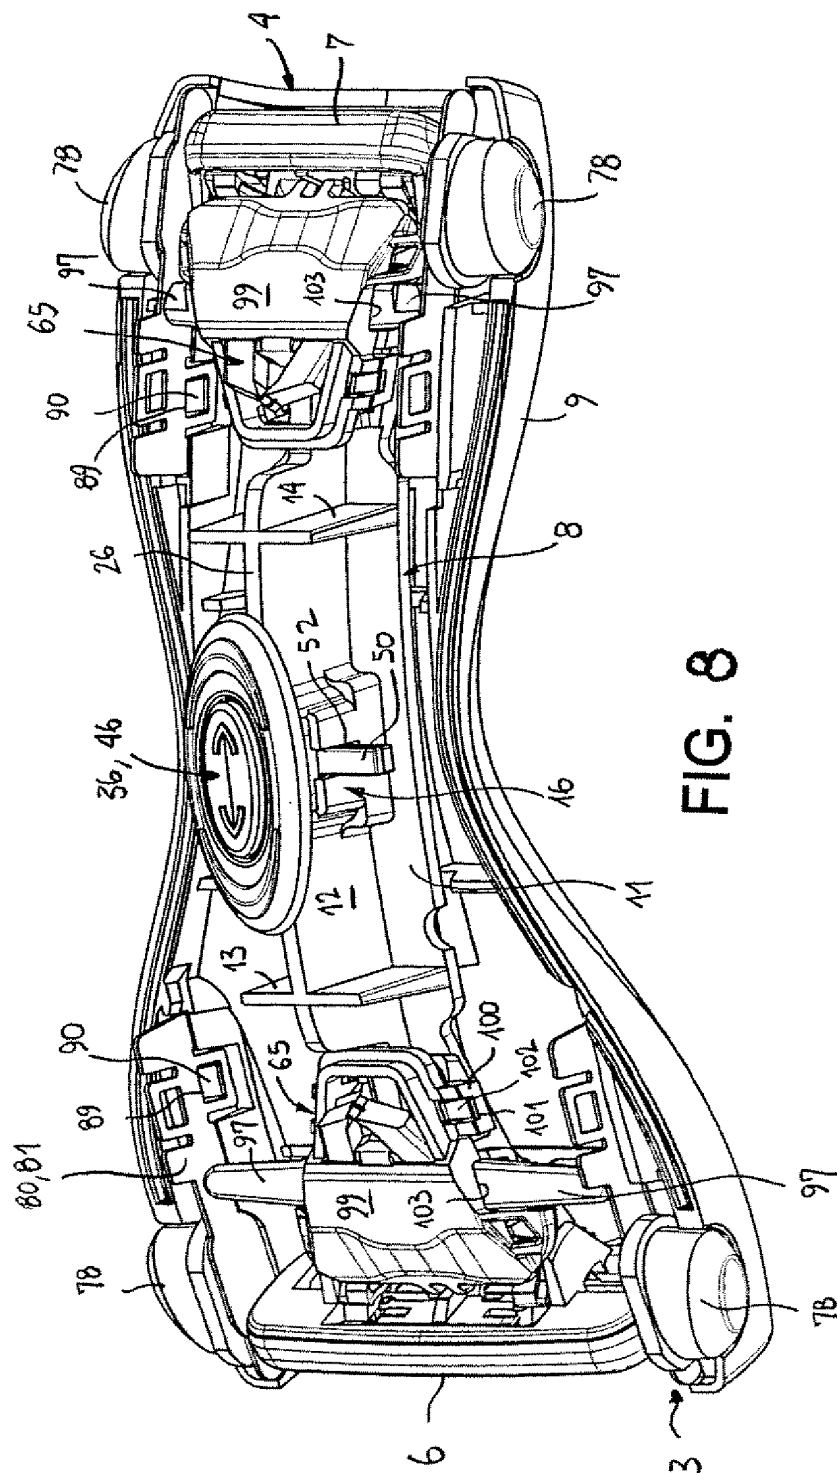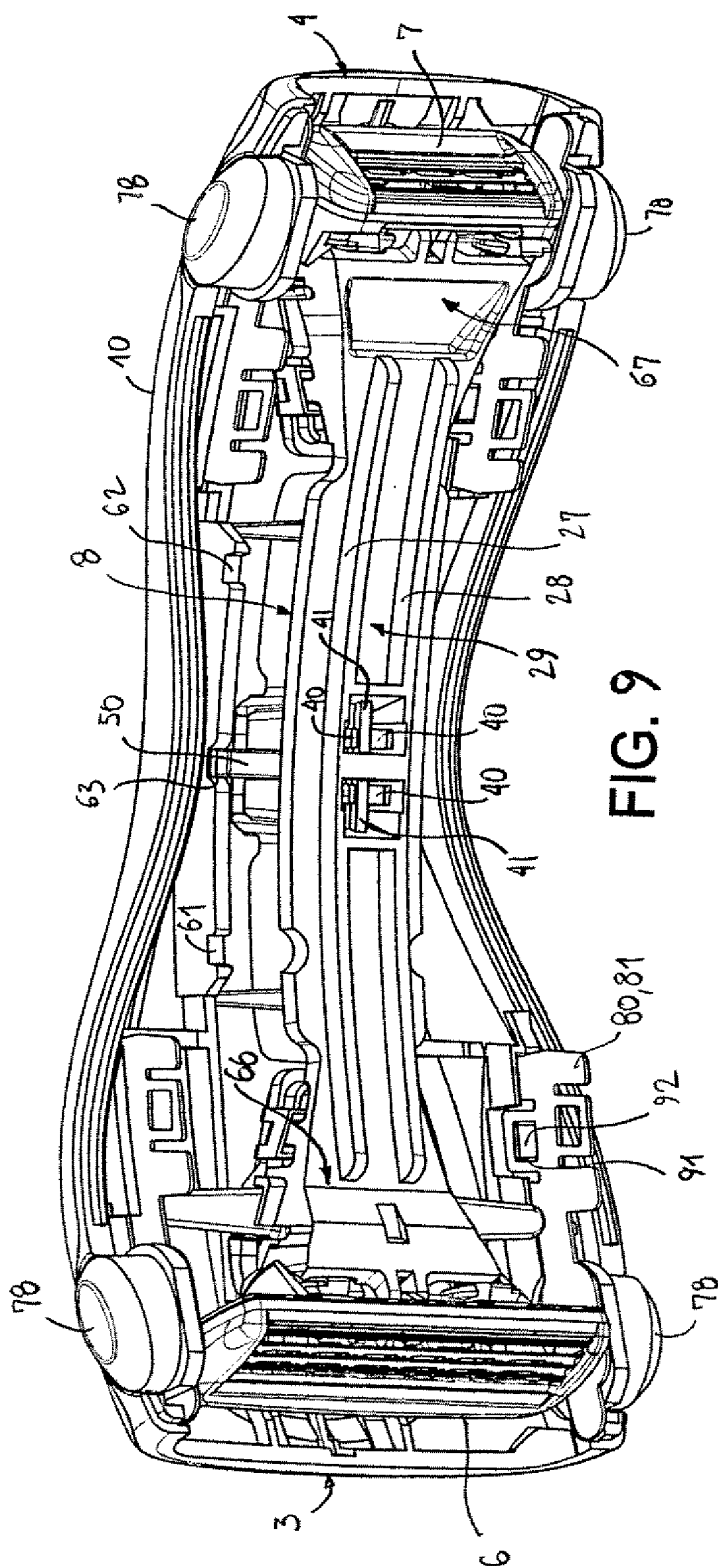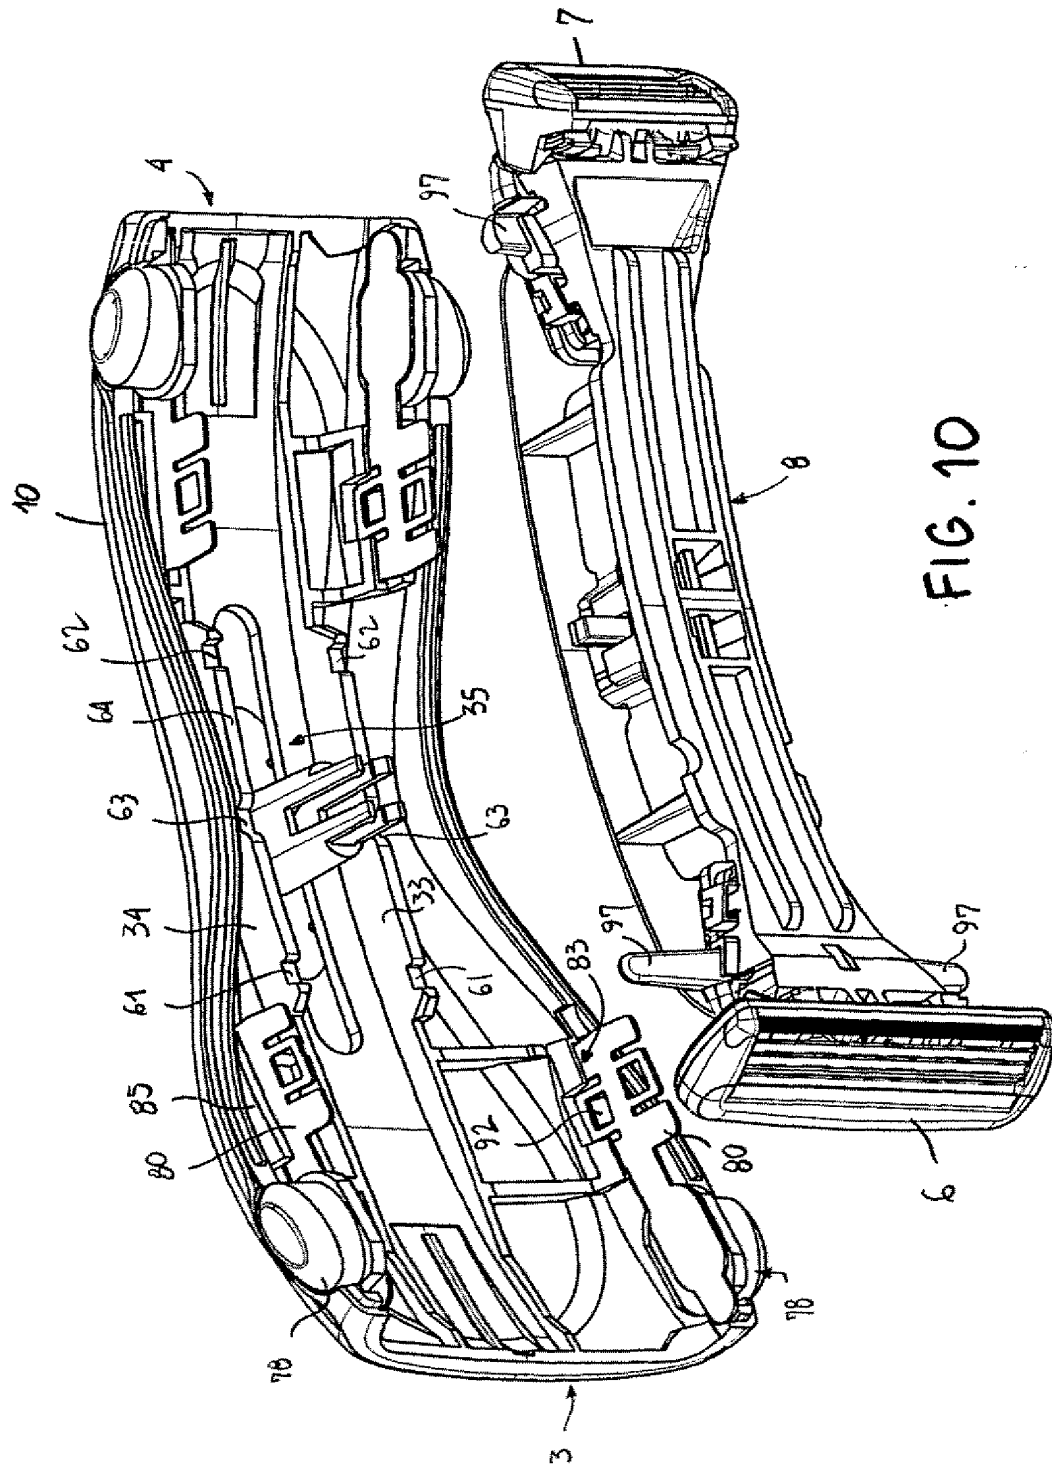

8
G.
F.





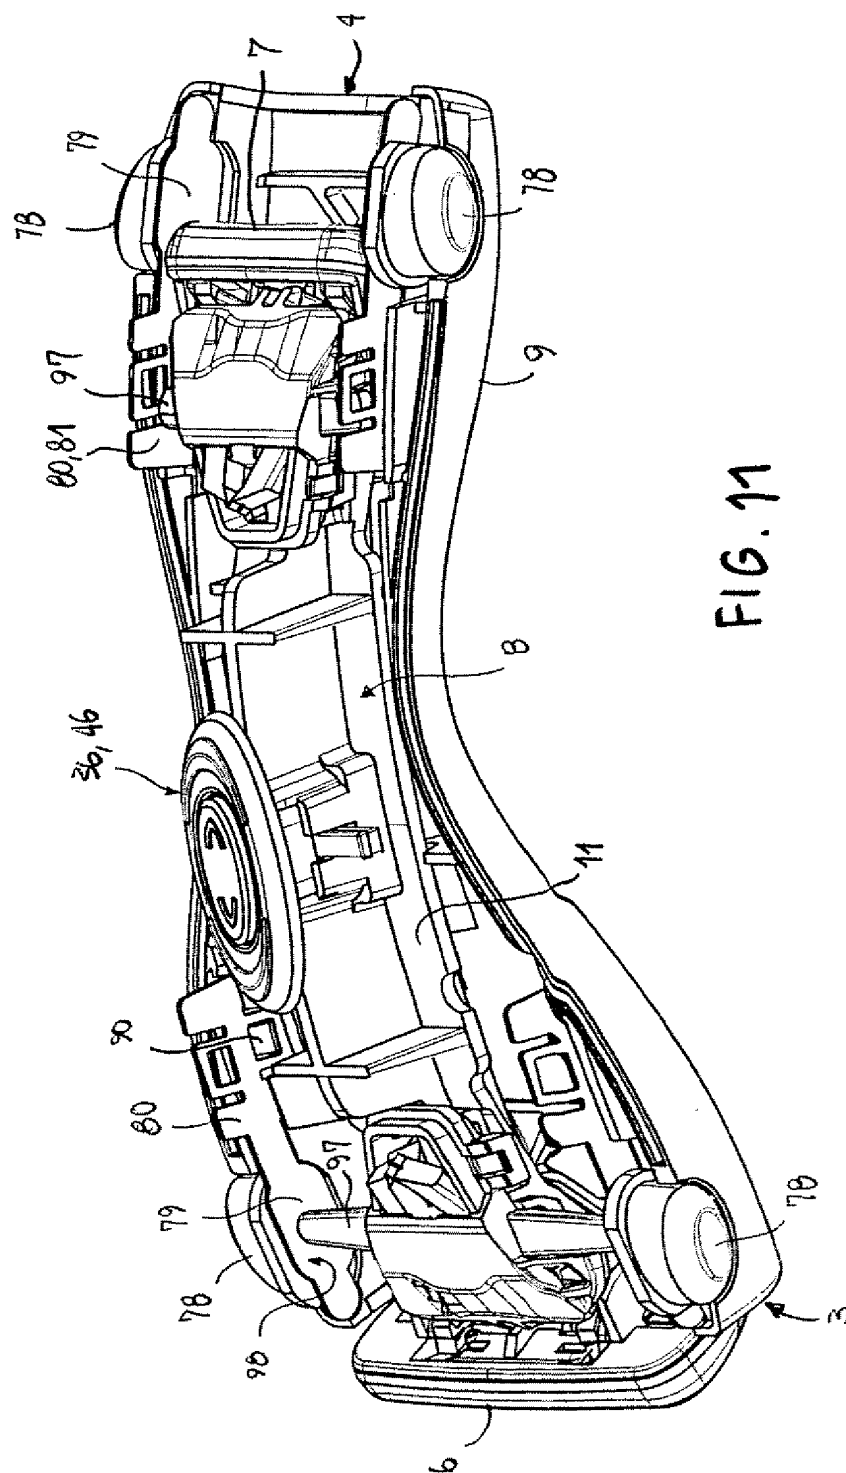


FIG. 11

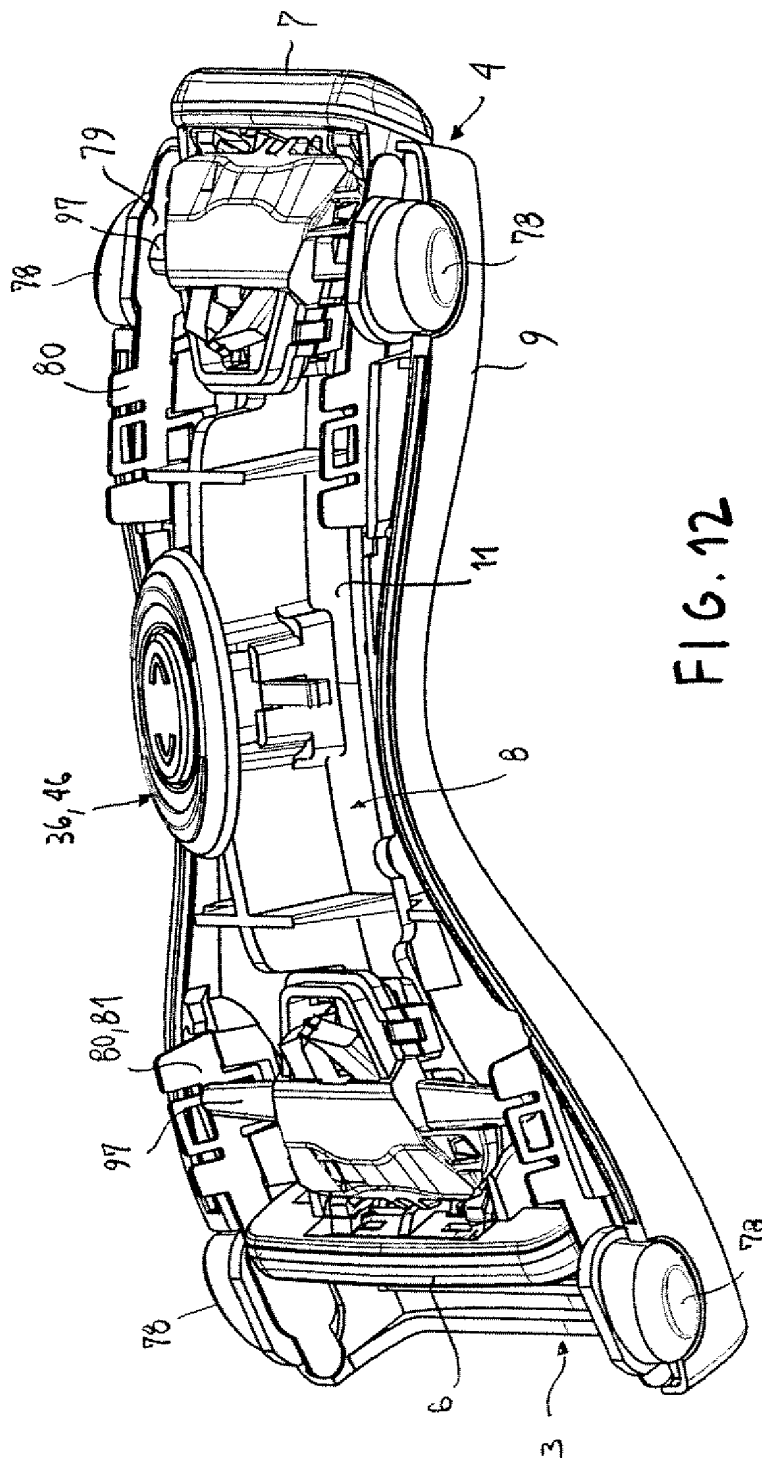


FIG. 12

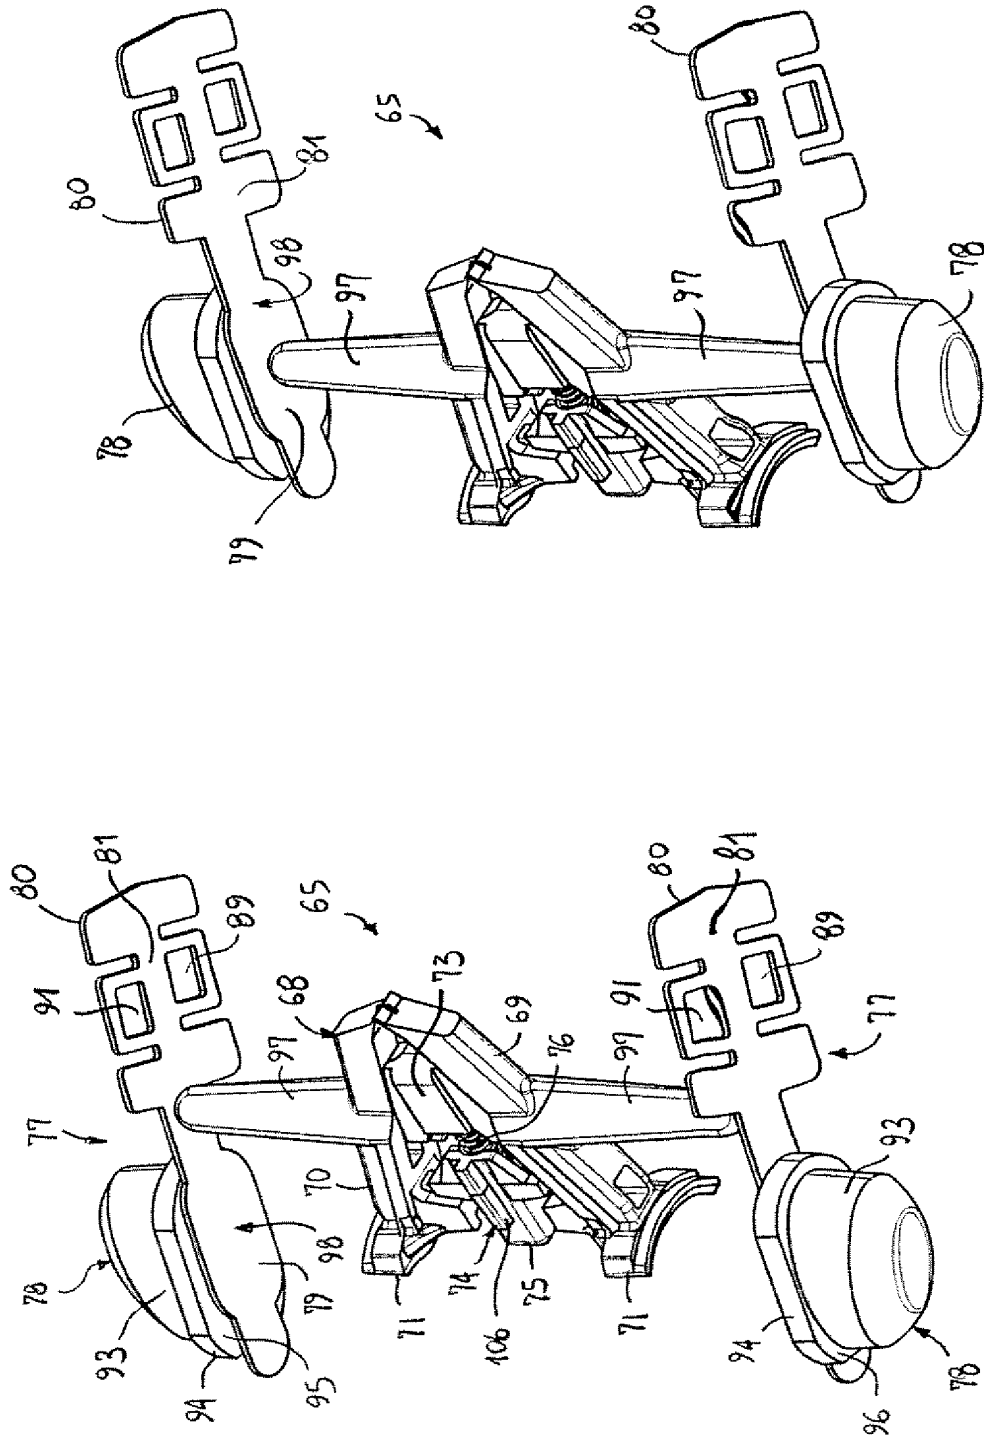


FIG. 13

FIG. 14

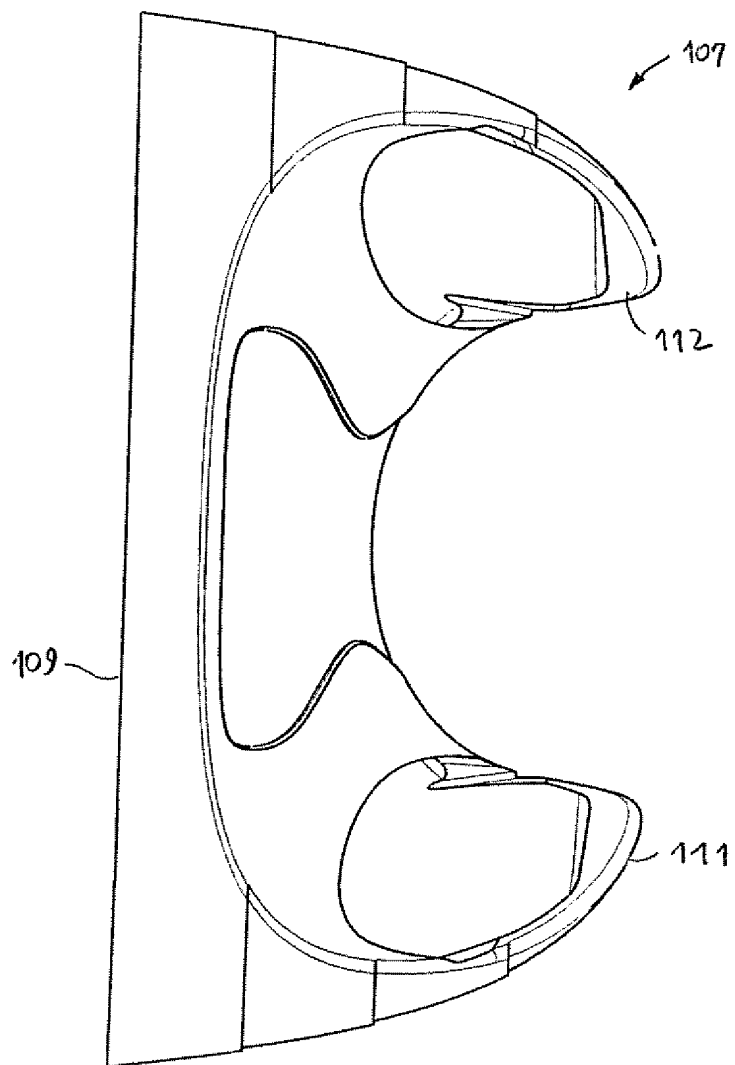


FIG. 15

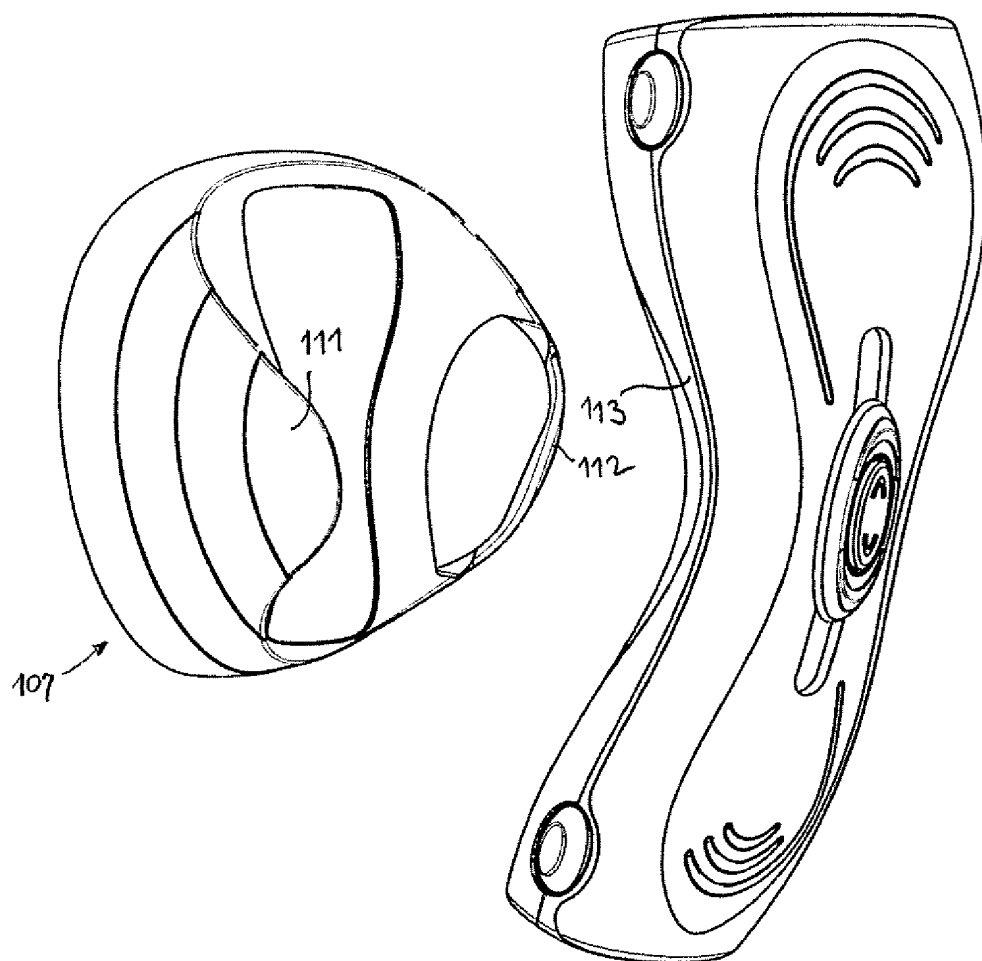


FIG. 16

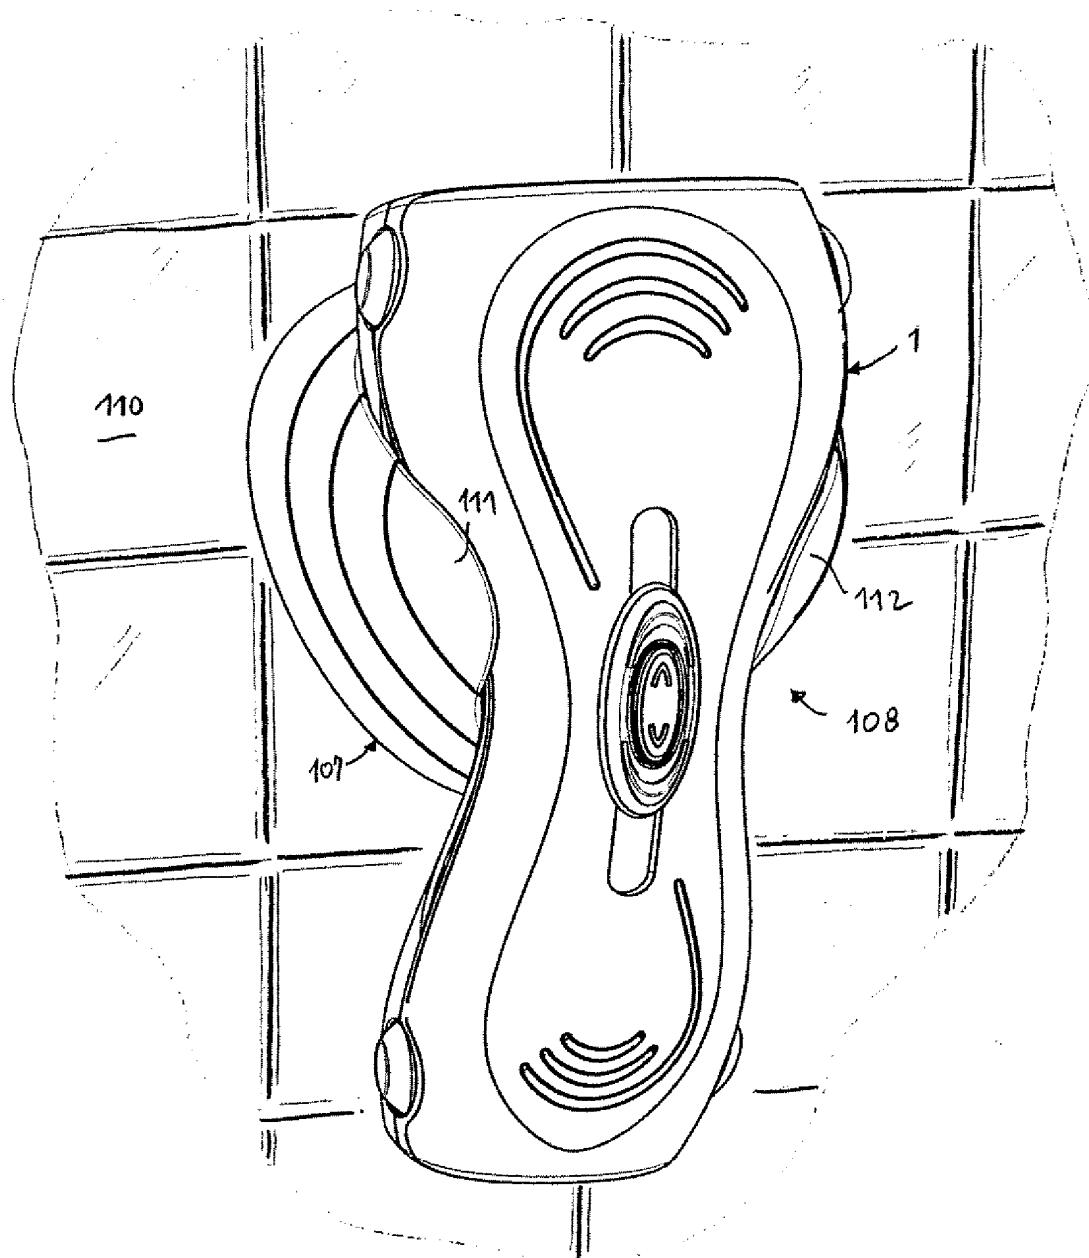


FIG. 17

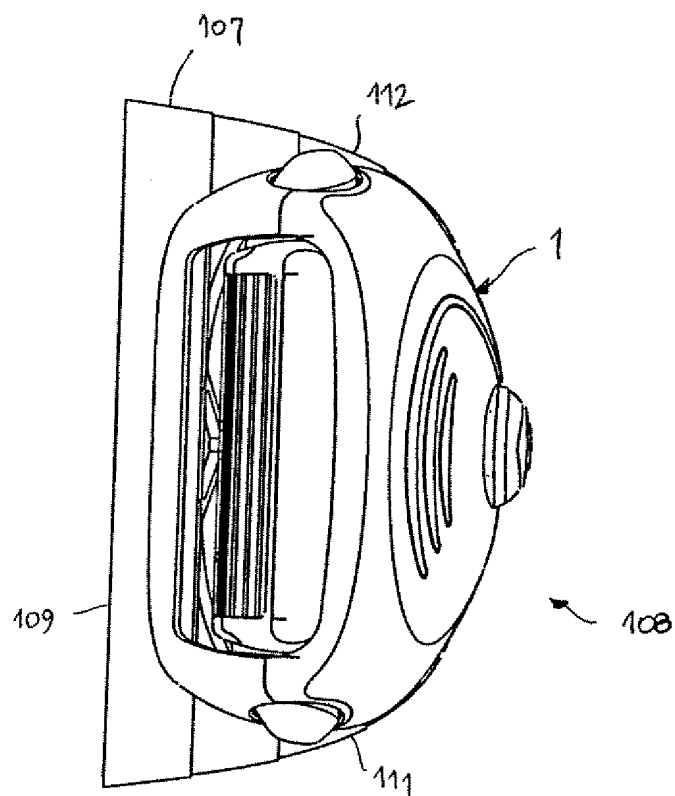


FIG. 18